


ARGUSTM
A Company of Quality
(AN ISO 9001 : 2015 Certified Company)

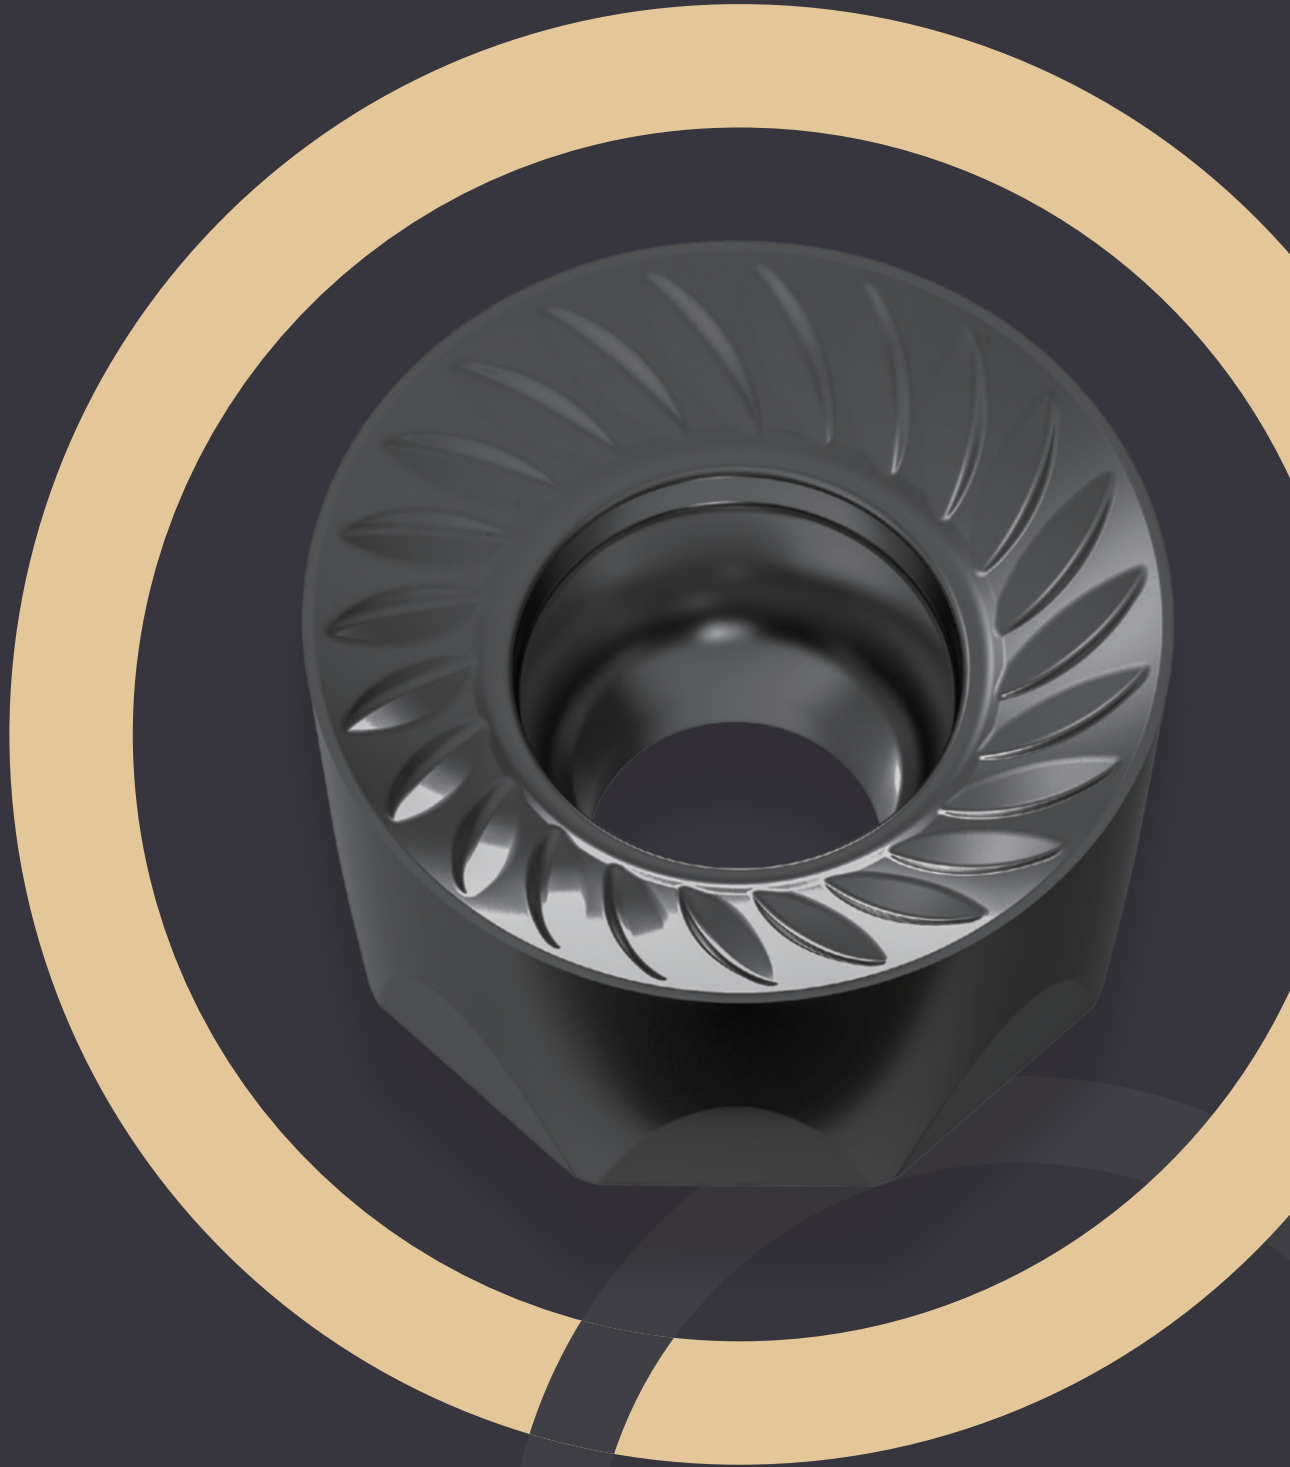

www.arguscarbide.com

Welcome to Argus Carbide Private Limited

It is our pleasure to introduce Argus Carbide as a global marketing Conglomerate dealing in Carbide Inserts, CNC & VMC Tools Holder. Established in the year 2017, at Rajkot (Gujarat, India), we, "Argus Carbide", are the reckoned Manufacturer and Supplier of supreme quality Carbide Inserts, Tools holder and Solid Carbide Tools. The offered products are precisely engineered with the help of finest grade metal and cutting-edge technology in compliance with set industry standards. These products are widely used in number of Mechanical, Engineering and Automobile Industries for different purposes. Our offered products are made available in number of shapes, sizes and dimensions as per the specifications lay down by our customers.

Our Vision

"Argus Carbide's vision is to be the world leader in Engineering Products Manufacturer and Related Services. Of Course this is a Company of Quality that never compromise in Quality. We will make a space in world with our Quality Products."

Why Us

In order to keep track with changing environment and advancement, we keep changing designs and models in our product range. These products are highly demanded by our customers for their corrosion resistivity, high strength, smooth functioning, sturdy construction, dimensional accuracy, smooth edges and durability.



Scan this QR code with
smartphone to visit
our website



Certificate of Registration

This is to certify that the Quality Management System of

ARGUS CARBIDE PRIVATE LIMITED

**BESIDE AVADH TRAVELS SHREEGANESH, FIRST FLOOR, GANESH IND. AREA PLOT 1B,
NR HOTEL KRISHNA PARK, GONDAL RD BYPASS CIRCLE, NATIONAL
HIGHWAY-27, NR. HDFC BANK, RAJKOT, GUJARAT, INDIA**

has been assessed independently by RQC and found to comply with the
requirements of

(Quality Management System)

ISO 9001:2015

For the following scope:

**MANUFACTURER & SUPPLIER OF CARBIDE CUTTING TOOLS LIKE
INSERTS FOR TURNING, MILLING, THREADING, GROOVING, DRILLING,
PARTING, PCD, CBN, CERMET**

Certification Calendar:

Certificate No: INQ2609172/8172

Registered on: 26.09.2022

Issued on: 26.09.2022

Expires on: 25.09.2025

1st Surveillance on/before: 25.09.2023

2nd Surveillance on/before: 25.09.2024

Executive Director

RADIANCE QUALITY CERTIFICATIONS

Regd. Office - 20-22 Wenlock Rd, Hoxton,
London N1 7GU, UK



Regd. off. 20-22 Wenlock Rd, Hoxton, London N1 7GU, UK

Terms & conditions

1. Validity of this certificate is subject to the organization maintaining its system in accordance with respective management systems standards along with RQC requirements.
2. This certificate remains the property of radiance quality certifications to whom it must be returned upon request.
3. Use of logo must be in accordance with the requirement of the UKAS accreditation board (in any) failure to meet the requirement shall be held liable for actions.
4. This certificate is not final evidence of certification status, status must be verified in writing from info@ukasltd.co.uk or it can be verified online at <http://ukasltd.co.uk/certified-clients/>

CERTIFICATE CERTIFICADO CERTIFIKAT CERTIFICATE









Index

Grade Information	05
Inserts for Steel	06.... to07
Inserts for Stainless Steel	08.... to10
Inserts for Cast Iron	11.... to12
Inserts for Finishing (Cermet)	13.... to16
Inserts for Non-Ferrous Metals	17.... to18
PCD Inserts for Non-Ferrous Metals	19.... to20
CBN Inserts for Hard Alloy Metals	21
Inserts for Milling	22
Inserts for Drilling	23
Inserts for Internal Threading	24.... to26
Inserts for External Threading	27.... to28
Inserts for Internal Grooving	29.... to30
Inserts for External Grooving	31.... to32
Inserts for Parting	33
Endmill	34
Ballnose	35
Endmill For Aluminium	36
Indexable Endmill Series	37.... to38
Face Mill Series	39.... to40
Sholder Mill Series	41
SP Indexable U-drill	42.... to47








Grade Information

Grade	Workpiece	Applications	Coating
AG1018	Steel	Semi-Finishing, Roughing	Golden
AG1020	Steel	Semi-Finishing, Roughing	Black Golden
AG1025	Steel	Semi-Finishing, Roughing	Black
AG2022	Stainless Steel	Finishing, Semi-Finishing & Roughing	Brown
AG2025	Stainless Steel	Finishing, Semi-Finishing & Roughing	Silver Butter
AG2035	Stainless Steel	Finishing, Semi-Finishing & Roughing	Golden
AG3018	Cast Iron & Forging	Semi-Finishing, Roughing	Golden
AG3020	Cast Iron & Forging	Semi-Finishing, Roughing	Black Golden
AG3025	Cast Iron & Forging	Semi-Finishing, Roughing	Black
AG5015	Universal (P, M, K)	Finishing, Semi-Finishing	Brown / Silver
AG5030	Universal (P, M, K)	Finishing, Semi-Finishing	--
AG5050	Universal (P, M, K)	Finishing, Semi-Finishing	Multicolor
AC10	Carbon steel, Alloyed Steel	Finishing, Semi-Finishing	Uncoated (Silver)
AC31	Carbon steel, Alloyed Steel	Finishing, Semi-Finishing	Golden
AL10	Non Ferrous	Finishing, Semi-Finishing	Uncoated (Silver)
APC 10 (PCD)	Non Ferrous	Finishing, Semi-Finishing	Uncoated (Silver)
ACB 501 (CBN)	Hard Alloy	Finishing, Semi-Finishing, Roughing	Black Brazed
ACB 515 (CBN)	Hard Alloy	Finishing, Semi-Finishing, Roughing	Black










Inserts for Steel

Appearance	Type	Dimensions (mm)				Grade		
		ØI.C.	S	Ød	R	AG1018	AG1020	AG1025
	CCMT060204-MP	6.35	2.38	2.8	0.8	▲	□	
	CCMT060208-MP	6.35	2.38	2.8	0.8	▲	□	
	CCMT09T304-MP	9.525	3.97	4.4	0.4	▲	□	
	CCMT09T308-MP	9.525	3.97	4.4	0.8	▲	□	
	CNMG120404-AQ	12.7	4.76	5.16	0.4	▲		
	CNMG120408-AQ	12.7	4.76	5.16	0.8	▲		
	CNMG120412-AQ	12.7	4.76	5.16	1.2	▲		
	CNMG120404-DC	12.7	4.76	5.16	0.4		□	
	CNMG120408-DC	12.7	4.76	5.16	0.8		□	
	CNMG120412-DC	12.7	4.76	5.16	1.2		□	
	CNMG120404-EM	12.7	4.76	5.16	0.4	▲		◡
	CNMG120408-EM	12.7	4.76	5.16	0.8	▲		◡
	CNMG120412-EM	12.7	4.76	5.16	1.2	▲		◡
	DNMG150604-AM	12.7	6.35	5.16	0.4		□	
	DNMG150608-AM	12.7	6.35	5.16	0.8		□	
	DNMG150612-AM	12.7	6.35	5.16	1.2		□	
	SNMG120404-EM	12.7	4.76	5.16	0.4	▲		
	SNMG120408-EM	12.7	4.76	5.16	0.8	▲		
	SNMG120412-EM	12.7	4.76	5.16	1.2	▲		
	TNMG160404-AQ	9.525	4.76	3.81	0.4	▲	□	
	TNMG160408-AQ	9.525	4.76	3.81	0.8	▲	□	
	TNMG160412-AQ	9.525	4.76	3.81	1.2	▲	□	
	TNMG160404-DC	9.525	4.76	3.81	0.4		□	
	TNMG160408-DC	9.525	4.76	3.81	0.8		□	
	TNMG160412-DC	9.525	4.76	3.81	1.2		□	

Cont...

Appearance	Type	Dimensions (mm)				Grade		
		ØI.C.	S	Ød	R	AG1018	AG1020	AG1025
	TNMG160404-EM	9.525	4.76	3.81	0.4	▲	■	◡
	TNMG160408-EM	9.525	4.76	3.81	0.8	▲	■	◡
	TNMG160412-EM	9.525	4.76	3.81	1.2	▲	■	◡
	TNMG160404-OEM	9.525	4.76	3.81	0.4			◡
	TNMG160408-OEM	9.525	4.76	3.81	0.8			◡
	TNMG160412-OEM	9.525	4.76	3.81	1.2			◡
	TNMG160404L/R-ZC	9.525	4.76	3.81	0.4	▲		◡
	TNMG160408L/R-ZC	9.525	4.76	3.81	0.8	▲		◡
	VNMG12T304-PF	7.15	3.97	3.46	0.4			◡
	VNMG12T308-PF	7.15	3.97	3.46	0.8			◡
	VNMG160404-EM	9.25	4.76	3.81	0.4	▲		
	VNMG160408-EM	9.25	4.76	3.81	0.8	▲		
	VNMG160412-EM	9.25	4.76	3.81	1.2	▲		
	WNMG080404-AQ	12.7	4.76	5.16	0.4	▲		
	WNMG080408-AQ	12.7	4.76	5.16	0.8	▲		
	WNMG080412-AQ	12.7	4.76	5.16	1.2	▲		
	WNMG080404-DC	12.7	4.76	5.16	0.4		■	
	WNMG080408-DC	12.7	4.76	5.16	0.8		■	
	WNMG080412-DC	12.7	4.76	5.16	1.2		■	
	WNMG060404-EM	9.525	4.76	3.81	0.4	▲		
	WNMG060408-EM	9.525	4.76	3.81	0.8	▲		
	WNMG060412-EM	9.525	4.76	3.81	1.2	▲		
	WNMG080404-EM	12.7	4.76	5.16	0.4	▲		◡
	WNMG080408-EM	12.7	4.76	5.16	0.8	▲		◡
	WNMG080412-EM	12.7	4.76	5.16	1.2	▲		◡

Inserts for Stainless Steel

Appearance	Type	Dimensions (mm)				Grade		
		ØI.C.	S	Ød	R	AG2022	AG2025	AG2035
	CCMT060204-GD	6.35	2.38	2.8	0.4			◆
	CCMT060208-GD	6.35	2.38	2.8	0.8			◆
	CCMT09T304-GD	9.525	3.97	4.4	0.4			◆
	CCMT09T308-GD	9.525	3.97	4.4	0.8			◆
	CCMT060204-MC	6.35	2.38	2.8	0.4	△		
	CCMT060208-MC	6.35	2.38	2.8	0.8	△		
	CCMT09T304-MC	9.525	3.97	4.4	0.4	△		
	CCMT09T308-MC	9.525	3.97	4.4	0.8	△		
	CCMT060204-MP	6.35	2.38	2.8	0.4	△		
	CCMT060208-MP	6.35	2.38	2.8	0.8	△		
	CCMT09T304-MP	9.525	3.97	4.4	0.4	△		
	CCMT09T308-MP	9.525	3.97	4.4	0.8	△		
	CNMG120404-AF	12.7	4.76	5.16	0.4	△		
	CNMG120408-AF	12.7	4.76	5.16	0.8	△		
	CNMG120412-AF	12.7	4.76	5.16	1.2	△		
	CNMG120404-GD	12.7	4.76	5.16	0.4			◆
	CNMG120408-GD	12.7	4.76	5.16	0.8			◆
	CNMG120412-GD	12.7	4.76	5.16	1.2			◆
	CNMG120404-MS	12.7	4.76	5.16	0.4	△	■	
	CNMG120408-MS	12.7	4.76	5.16	0.8	△	■	
	DCMT070204-VM	6.35	2.38	2.8	0.4	△		
	DCMT070208-VM	6.35	2.38	2.8	0.8	△		
	DCMT11T304-MP	9.525	3.97	4.4	0.4	△		
	DCMT11T308-MP	9.525	3.97	4.4	0.8	△		
	DNMG150404-GD	12.7	4.76	5.16	0.4			◆
	DNMG150408-GD	12.7	4.76	5.16	0.8			◆
	DNMG150412-GD	12.7	4.76	5.16	1.2			◆





Cont...











Inserts for Stainless Steel

Appearance	Type	Dimensions (mm)				Grade		
		ØI.C.	S	Ød	R	AG2022	AG2025	AG2035
	SNMG120404-MS	12.7	4.76	5.16	0.4	△	■	
	SNMG120408-MS	12.7	4.76	5.16	0.8	△	■	
	SNMG120412-MS	12.7	4.76	5.16	1.2	△	■	
	TCMT110204-MP	6.35	2.38	2.8	0.4	△		
	TCMT110208-MP	6.35	2.38	2.8	0.8	△		
	TCMT16T304-MP	9.525	3.97	4.4	0.4	△		
	TCMT16T308-MP	9.525	3.97	4.4	0.8	△		
	TNMG160404-AF	9.525	4.76	3.81	0.4	△	■	
	TNMG160408-AF	9.525	4.76	3.81	0.8	△	■	
	TNMG160412-AF	9.525	4.76	3.81	1.2	△	■	
	TNMG160402-GD	9.525	4.76	3.81	0.2			◆
	TNMG160404-GD	9.525	4.76	3.81	0.4			◆
	TNMG160408-GD	9.525	4.76	3.81	0.8			◆
	TNMG160412-GD	9.525	4.76	3.81	1.2			◆
	TNMG160404-MQ	9.525	4.76	3.81	0.4	△		
	TNMG160408-MQ	9.525	4.76	3.81	0.8	△		
	TNMG160412-MQ	9.525	4.76	3.81	1.2	△		
	TNMG160404-MS	9.525	4.76	3.81	0.4	△		
	TNMG160408-MS	9.525	4.76	3.81	0.8	△		
	TNMG160404-SM	9.525	4.76	3.81	0.4	△		
	TNMG160408-SM	9.525	4.76	3.81	0.8	△		
	TNMG160412-SM	9.525	4.76	3.81	1.2	△		
	VBMT160404-VM	9.525	4.76	4.4	0.4	△		
	VBMT160408-VM	9.525	4.76	4.4	0.8	△		
	VNMG160404-MA	9.525	4.76	3.81	0.4	△		
	VNMG160408-MA	9.525	4.76	3.81	0.8	△		
	VNMG160404-AF	9.525	4.76	3.81	0.4	△		
	VNMG160408-AF	9.525	4.76	3.81	0.8	△		

Cont...



Inserts for Stainless Steel

Appearance	Type	Dimensions (mm)				Grade		
		ØI.C.	S	Ød	R	AG2022	AG2025	AG2035
	VNMG160404-GD	9.525	4.76	3.81	0.4			◆
	VNMG160408-GD	9.525	4.76	3.81	0.8			◆
	VNMG160412-GD	9.525	4.76	3.81	1.2			◆
	VNMG160404-MS	9.525	4.76	3.81	0.4		■	
	VNMG160408-MS	9.525	4.76	3.81	0.8		■	
	WNMG080408-AF	12.7	4.76	5.16	0.8	△	■	
	WNMG080412-AF	12.7	4.76	5.16	1.2	△	■	
	WNMG080404-GD	12.7	4.76	5.16	0.4			◆
	WNMG080408-GD	12.7	4.76	5.16	0.8			◆
	WNMG080412-GD	12.7	4.76	5.16	1.2			◆









Appearance	Type	Dimensions (mm)				Grade		
		ØI.C.	S	Ød	R	AG3018	AG3020	AG3025
	CNMA120404	12.7	4.76	5.16	0.4			□
	CNMA120408	12.7	4.76	5.16	0.8			□
	CNMA120412	12.7	4.76	5.16	1.2			□
	CNMG120404-MS	12.7	4.76	5.16	0.4		△	
	CNMG120408-MS	12.7	4.76	5.16	0.8		△	
	CNMG120412-MS	12.7	4.76	5.16	1.2		△	
	SNMA120404	12.7	4.76	5.16	0.4			□
	SNMA120408	12.7	4.76	5.16	0.8			□
	SNMA120412	12.7	4.76	5.16	1.2			□
	SNMG120404-MS	12.7	4.76	5.16	0.4		△	
	SNMG120408-MS	12.7	4.76	5.16	0.8		△	
	SNMG120412-MS	12.7	4.76	5.16	1.2		△	
	TNMA160404	9.525	4.76	3.81	0.4			□
	TNMA160408	9.525	4.76	3.81	0.8			□
	TNMA160412	9.525	4.76	3.81	1.2			□
	TNMA160404	9.525	4.76	3.81	0.4		△	
	TNMA160408	9.525	4.76	3.81	0.8		△	
	TNMA160412	9.525	4.76	3.81	1.2		△	
	TNMG160404-HG	9.525	4.76	3.81	0.4		△	
	TNMG160408-HG	9.525	4.76	3.81	0.8		△	
	TNMG160412-HG	9.525	4.76	3.81	1.2		△	
	TNMG160404-MS	9.525	4.76	3.81	0.4		△	
	TNMG160408-MS	9.525	4.76	3.81	0.8		△	
	TNMG160412-MS	9.525	4.76	3.81	1.2		△	
	VNMG160404-MS	9.525	4.76	3.81	0.4		△	
	VNMG160408-MS	9.525	4.76	3.81	0.8		△	
	VNMG160404-MSF	9.525	4.76	3.81	0.4			□
	VNMG160408-MSF	9.525	4.76	3.81	0.8			□

Cont...

Inserts for Cast Iron






Appearance	Type	Dimensions (mm)				Grade		
		ØI.C.	S	Ød	R	AG3018	AG3020	AG3025
	WNMA080404	12.7	4.76	5.16	0.4			□
	WNMA080408	12.7	4.76	5.16	0.8			□
	WNMA080412	12.7	4.76	5.16	1.2			□
	WNMG080404-MS	12.7	4.76	5.16	0.4		△	
	WNMG080408-MS	12.7	4.76	5.16	0.8		△	
	WNMG080412-MS	12.7	4.76	5.16	1.2		△	

Inserts for Finishing (Cermet)

Appearance	Type	Dimensions (mm)				Grade		
		ØI.C.	S	Ød	R	AC10	AC31	
	CCMT060204-GF	6.35	2.38	2.8	0.4	▲	■	
	CCMT09T304-GF	9.525	3.97	4.4	0.4	▲	■	
	CCMT09T308-GF	9.525	3.97	4.4	0.8	▲	■	
	CCMT09T304-BT	9.525	3.97	4.4	0.4	▲	■	
	CCMT09T308-BT	9.525	3.97	4.4	0.8	▲	■	
	CCMT060202-FQ	6.35	2.38	2.8	0.2	▲	■	
	CCMT060204-FQ	6.35	2.38	2.8	0.4	▲	■	
	CCMT09T302-FQ	9.525	3.97	4.4	0.2	▲	■	
	CCMT09T304-FQ	9.525	3.97	4.4	0.4	▲	■	
	CCMT09T308-FQ	9.525	3.97	4.4	0.8	▲	■	
	CNMG120404-FQ	12.7	4.76	5.16	0.4	▲	■	
	CNMG120408-FQ	12.7	4.76	5.16	0.8	▲	■	
	CNMG120404-GX	12.7	4.76	5.16	0.4	▲	■	
	CNMG120408-GX	12.7	4.76	5.16	0.8	▲	■	
	CNMG120404-MS	12.7	4.76	5.16	0.4	▲	■	
	CNMG120408-MS	12.7	4.76	5.16	0.8	▲	■	
	DCMT070204-GF	6.35	2.38	2.8	0.4	▲	■	
	DCMT11T304-GF	9.525	3.97	4.4	0.4	▲	■	
	DCMT11T308-GF	9.525	3.97	4.4	0.8	▲	■	
	DCMT070202-FQ	6.35	2.38	2.8	0.2	▲	■	
	DCMT070204-FQ	6.35	2.38	2.8	0.4	▲	■	
	DCMT11T302-FQ	9.525	3.97	4.4	0.2	▲	■	
	DCMT11T304-FQ	9.525	3.97	4.4	0.4	▲	■	
	DCMT11T308-FQ	9.525	3.97	4.4	0.8	▲	■	









Cont...

Inserts for Finishing (Cermet)

Appearance	Type	Dimensions (mm)				Grade		
		ØI.C.	S	Ød	R	AC10	AC31	
	DNMG150404-GX	12.7	4.76	5.16	0.4	▲	■	
	DNMG150408-GX	12.7	4.76	5.16	0.8	▲	■	
	DNMG150404-FQ	12.7	4.76	5.16	0.4	▲	■	
	DNMG150408-FQ	12.7	4.76	5.16	0.8	▲	■	
	RPMT1203-BB	12.0	3.18			▲	■	
	TCMT110204-GF	6.35	2.38	2.8	0.4	▲	■	
	TCMT16T304-GF	9.525	3.97	4.4	0.4	▲	■	
	TCMT110204-BT	6.35	2.38	2.8	0.4	▲	■	
	TCMT110208-BT	6.35	2.38	2.8	0.8	▲	■	
	TCMT16T304-BT	9.525	3.97	4.4	0.4	▲	■	
	TCMT16T308-BT	9.525	3.97	4.4	0.8	▲	■	
	TCMT110202-FQ	6.35	2.38	2.8	0.2	▲	■	
	TCMT110204-FQ	6.35	2.38	2.8	0.4	▲	■	
	TCMT110208-FQ	6.35	2.38	2.8	0.8	▲	■	
	TCMT16T304-FQ	9.525	3.97	4.4	0.4	▲	■	
	TCMT16T308-FQ	9.525	3.97	4.4	0.8	▲	■	
	TNMG160404-GF	9.525	4.76	3.81	0.4	▲	■	
	TNMG160408-GF	9.525	4.76	3.81	0.8	▲	■	
	TNMG160404-FQ	9.525	4.76	3.81	0.4	▲	■	
	TNMG160408-FQ	9.525	4.76	3.81	0.8	▲	■	
	TNMG160404-GX	9.525	4.76	3.81	0.4	▲	■	
	TNMG160408-GX	9.525	4.76	3.81	0.8	▲	■	








Cont...

Inserts for Finishing (Cermet)





Appearance	Type	Dimensions (mm)				Grade		
		ØI.C.	S	Ød	R	AC10	AC31	
	TNMG160404-MS	9.525	4.76	3.81	0.4	▲	■	
	TNMG160408-MS	9.525	4.76	3.81	0.8	▲	■	
	TNMG160404-BT	9.525	4.76	3.81	0.4	▲	■	
	TNMG160408-BT	9.525	4.76	3.81	0.8	▲	■	
	TNMG160404R/L-FM	9.525	4.76	3.81	0.4	▲	■	
	TNMG160408R/L-FM	9.525	4.76	3.81	0.8	▲	■	
	TPGT060102L	3.97	1.59		0.2	▲	■	
	TPGT060104L	3.97	1.59		0.4	▲	■	
	TPGT080202L	4.76	2.38		0.2	▲	■	
	TPGT080204L	4.76	2.38		0.4	▲	■	
	TPGT090202L	5.56	2.38		0.2	▲	■	
	TPGT090204L	5.56	2.38		0.4	▲	■	
	TPGT110302L	6.35	3.18		0.2	▲	■	
	TPGT110304L	6.35	3.18		0.4	▲	■	
	VBMT110304-FQ	6.35	2.38	2.8	0.4	▲	■	
	VBMT160404-FQ	9.525	4.76	4.4	0.4	▲	■	
	VBMT160408-FQ	9.525	4.76	4.4	0.8	▲	■	
	VNMG160404-GX	9.525	4.76	3.81	0.4	▲	■	
	VNMG160408-GX	9.525	4.76	3.81	0.8	▲	■	
	VNMG160404-FQ	9.525	4.76	3.81	0.4	▲	■	
	VNMG160408-FQ	9.525	4.76	3.81	0.8	▲	■	
	VNMG160404-BT	9.525	4.76	3.81	0.4	▲	■	
	VNMG160408-BT	9.525	4.76	3.81	0.8	▲	■	

Cont...

Inserts for Finishing (Cermets)




Appearance	Type	Dimensions (mm)				Grade		
		ØI.C.	S	Ød	R	AC10	AC31	
	WBGT060102L/R FH	3.97	1.59		0.2	▲		
	WBGT060104L/R FH	3.97	1.59		0.4	▲		
	WNMG080404-GF	12.7	4.76	5.16	0.4	▲	■	
	WNMG080408-GF	12.7	4.76	5.16	0.8	▲	■	
	WNMG080404-FQ	12.7	4.76	5.16	0.4	▲	■	
	WNMG080408-FQ	12.7	4.76	5.16	0.8	▲	■	
	WNMG080412-FQ	12.7	4.76	5.16	1.2	▲	■	
	WNMG080404-GX	12.7	4.76	5.16	0.4	▲	■	
	WNMG080408-GX	12.7	4.76	5.16	0.8	▲	■	
	WNMG080404-SH	12.7	4.76	5.16	0.4	▲	■	
	WNMG080408-SH	12.7	4.76	5.16	0.8	▲	■	
	WNMG080412-SH	12.7	4.76	5.16	1.2	▲	■	
	WNMG080404-MS	12.7	4.76	5.16	0.4	▲	■	
	WNMG080408-MS	12.7	4.76	5.16	0.8	▲	■	
	WNMG080404-BT	12.7	4.76	5.16	0.4	▲	■	
	WNMG080408-BT	12.7	4.76	5.16	0.8	▲	■	

Inserts for Non-Ferrous Metals






Appearance	Type	Dimensions (mm)				Grade		
		ØI.C.	S	Ød	R	AL10		
	APGT113504-G2	6.16	3.5	2.8	0.4	▲		
	APGT113508-G2	6.16	3.5	2.8	0.8	▲		
	APGT160404-G2	9.52	3.5	2.8	0.4	▲		
	APGT160408-G2	9.52	3.5	2.8	0.8	▲		
	APKT160404-MA	9.52	3.5	2.8	0.4	▲		
	APKT160408-MA	9.52	3.5	2.8	0.8	▲		
	CCGT060202-AK	6.35	2.38	2.8	0.2	▲		
	CCGT060204-AK	6.35	2.38	2.8	0.4	▲		
	CCGT060208-AK	6.35	2.38	2.8	0.8	▲		
	CCGT09T302-AK	9.525	3.97	4.4	0.2	▲		
	CCGT09T304-AK	9.525	3.97	4.4	0.4	▲		
	CCGT09T308-AK	9.525	3.97	4.4	0.8	▲		
	CCGT120404-AK	12.7	4.76	5.56	0.4	▲		
	CCGT120408-AK	12.7	4.76	5.56	0.8	▲		
	DCGT070202-AK	6.35	2.38	2.8	0.2	▲		
	DCGT070204-AK	6.35	2.38	2.8	0.4	▲		
	DCGT11T302-AK	9.525	3.97	4.5	0.2	▲		
	DCGT11T304-AK	9.525	3.97	4.5	0.4	▲		
	DCGT11T308-AK	9.525	3.97	4.5	0.8	▲		

Cont...

Inserts for Non-Ferrous Metals









Appearance	Type	Dimensions (mm)				Grade		
		ØI.C.	S	Ød	R	AL10		
	TCGT090202-AK	5.56	2.38	2.5	0.2	▲		
	TCGT090204-AK	5.56	2.38	2.5	0.4	▲		
	TCGT090208-AK	5.56	2.38	2.5	0.8	▲		
	TCGT110202-AK	6.35	2.38	2.8	0.2	▲		
	TCGT110204-AK	6.35	2.38	2.8	0.4	▲		
	TCGT110208-AK	6.35	2.38	2.8	0.8	▲		
	TCGT160404-AK	9.52	3.97	4.4	0.4	▲		
	TCGT160408-AK	9.52	3.97	4.4	0.8	▲		
	TNMG160402-AK	9.52	4.76	3.81	0.2	▲		
	TNMG160404-AK	9.52	4.76	3.81	0.4	▲		
	TNMG160408-AK	9.52	4.76	3.81	0.8	▲		
	VCGT110302-AK	6.35	3.18	2.8	0.2	▲		
	VCGT110304-AK	6.35	3.18	2.8	0.4	▲		
	VCGT110308-AK	6.35	3.18	2.8	0.8	▲		
	VCGT160402-AK	9.52	4.76	4.4	0.2	▲		
	VCGT160404-AK	9.52	4.76	4.4	0.4	▲		
	VCGT160408-AK	9.52	4.76	4.4	0.8	▲		

PCD Inserts for Non-Ferrous Metals







Appearance	Type	Dimensions (mm)				Grade		
		ØI.C.	S	Ød	R	APC10		
	APGT113504	6.16	3.5	2.8	0.4	▲		
	APGT113508	6.16	3.5	2.8	0.8	▲		
	APGT160404	9.52	3.5	2.8	0.4	▲		
	APGT160408	9.52	3.5	2.8	0.8	▲		
	CCGT030102	3.5	1.39	1.9	0.2	▲		
	CCGT030104	3.5	1.39	1.9	0.4	▲		
	CCGT060202	6.35	2.38	2.8	0.2	▲		
	CCGT060204	6.35	2.38	2.8	0.4	▲		
	CCGT060208	6.35	2.38	2.8	0.8	▲		
	CCGT09T302	9.525	3.97	4.4	0.2	▲		
	CCGT09T304	9.525	3.97	4.4	0.4	▲		
	CCGT09T308	9.525	3.97	4.4	0.8	▲		
	CCGT120404	12.7	4.76	5.56	0.4	▲		
	CCGT120408	12.7	4.76	5.56	0.8	▲		
	CNGA120402	12.7	4.76	5.16	0.2	▲		
	CNGA120404	12.7	4.76	5.16	0.4	▲		
	CNGA120408	12.7	4.76	5.16	0.8	▲		
	DCGT070202	6.35	2.38	2.8	0.2	▲		
	DCGT070204	6.35	2.38	2.8	0.4	▲		
	DCGT070208	6.35	2.38	2.8	0.8	▲		
	DCGT11T302	9.525	3.97	4.4	0.2	▲		
	DCGT11T304	9.525	3.97	4.4	0.4	▲		
	DCGT11T308	9.525	3.97	4.4	0.8	▲		
	TCGT090202	5.56	2.38	2.5	0.2	▲		
	TCGT090204	5.56	2.38	2.5	0.4	▲		
	TCGT110202	6.35	2.38	2.8	0.2	▲		
	TCGT110204	6.35	2.38	2.8	0.4	▲		
	TCGT110208	6.35	2.38	2.8	0.8	▲		

Cont...














PCD Inserts for Non-Ferrous Metals


Appearance	Type	Dimensions (mm)				Grade		
		ØI.C.	S	Ød	R	APC10		
	TCGT16T304	9.52	3.97	4.4	0.4	▲		
	TCGT16T308	9.52	3.97	4.4	0.8	▲		
	MGMN200					▲		
	MGMN300					▲		
	MGMN400					▲		
	TDC-2					▲		
	TDC-3					▲		
	TDC-4					▲		
	TNGA160402	9.52	4.76	3.81	0.2	▲		
	TNGA160404	9.52	4.76	3.81	0.4	▲		
	TNGA160408	9.52	4.76	3.81	0.8	▲		
	VCGT110302	6.35	3.18	2.8	0.2	▲		
	VCGT110304	6.35	3.18	2.8	0.4	▲		
	VCGT160402	9.52	4.76	4.4	0.2	▲		
	VCGT160404	9.52	4.76	4.4	0.4	▲		
	VCGT160408	9.52	4.76	4.4	0.8	▲		
	2 IR A60	6.35				▲		
	3 IR AG60	9.525				▲		
	3 ER AG60	9.525				▲		

CBN Inserts for Hard Alloy Metals








Appearance	Type	Dimensions (mm)				Grade		
		ØI.C.	S	Ød	R	ACB501	ACB515	
	CCGW060204-HK	6.35	2.38	2.8	0.4	▲		
	CCGW060208-HK	6.35	2.38	2.8	0.8	▲		
	CCGW09T304-HK	9.525	3.97	4.4	0.4	▲		
	CCGW09T308-HK	9.525	3.97	4.4	0.8	▲		
	CNGA120404-HK	12.7	4.76	5.16	0.4	▲	◊	
	CNGA120408-HK	12.7	4.76	5.16	0.8	▲	◊	
	CNGA120412-HK	12.7	4.76	5.16	1.2	▲	◊	
	RNGN120400	12.7	4.76		0		◊	
	TNGA160404-HK	9.52	4.76	3.81	0.4	▲	◊	
	TNGA160408-HK	9.52	4.76	3.81	0.8	▲	◊	
	TNGA160412-HK	9.52	4.76	3.81	1.2	▲	◊	
	VNGA160404-HK	9.525	4.76	3.81	0.4	▲		
	VNGA160408-HK	9.525	4.76	3.81	0.8	▲		
	VNGA160412-HK	9.525	4.76	3.81	1.2	▲		
	WNGA080408-HK	12.7	4.76	5.16	0.8	▲	◊	
	WNGA080412-HK	12.7	4.76	5.16	1.2	▲	◊	

Inserts for Milling

Appearance	Type	Dimensions (mm)				Grade		
		ØI.C.	S	Ød	R	AG5015	AG5030	AG5050
	APMT1135PDTR	10.83	3.5	2.8	0.8	▲ ▲		
	APMT1604PDER-M	16.26	4.76	4.6	0.8	▲ ▲		
	APMT1135PDER-M	10.83	3.5	2.8	0.8		■	
	APMT1604PDER-M2	16.26	4.76	4.6	0.8		■	
	APMT1135PDER-M2	10.83	3.5	2.8	0.8		■	
	APMT1604PDER-M2	16.26	4.76	4.6	0.8		■	
	LNMU0303ZER	0.236	0.169		0.047	▲ ▲	■	■
	ONMU060506-HK	12.9	5.5	6.0	0.6	▲ ▲		
	ONMU080608-HK	20.2	5.55	5.6	0.8	▲ ▲		
	RPMT08T2MO-JP	8.0	3.18	2.94			▲	
	RPMT10T3MO-JP	10.0	3.97	4.4			▲	
	RPMT1204MO-JP	12.0	4.76	4.4			▲	
	RDMT1204MO-MP	12.0	4.76	4.4		▲ ▲	■	
	SNMU150505-HK	12.9	5.5	6.0	0.5	▲ ▲		
	SNMX1206Q88-W	12.7	6.2	6.0	0.8	▲		
	SNMX1206Q88-W	12.7	6.2	6.0	0.8		■	
	WNMU080608-GH	14.0	6.65	6.15	0.8	▲ ▲	■	
	WNMU080608-GM	14.0	6.65	6.15	0.8	▲ ▲		




Appearance	Type	Dimensions (mm)				Grade		
		ØI.C.	S	Ød	R	AG5015	AG5030	AG5050
	SPMG050204-ZC	5.0	2.38	2.25	0.4	▲		
	SPMG060204-ZC	6.0	2.38	2.61	0.4	▲		
	SPMG07T308-ZC	7.94	3.97	2.85	0.8	▲		
	SPMG090408-ZC	9.80	4.30	4.05	0.8	▲		
	SPMG110408-ZC	11.50	4.80	4.45	0.8	▲		
	SPMG140512-ZC	14.30	5.20	5.75	1.2	▲		

Inserts for Internal Threading

Appearance	Type	Dimensions (mm)				Grade		
		ØI.C.	L	PITCH	R	AG5015	AG5030	
	08 IR 1.0 ISO	5	8.24	1		▲		
	08 IR 1.5 ISO	5	8.24	1.5		▲		
	08 IR A55	5	8.24	48-16		▲		
	08 IR A60	5	8.24	48-16		▲		
	11 IR 1.0 ISO	6.35	11	1		▲		
	11 IR 1.25 ISO	6.35	11	1.25		▲		
	11 IR 1.5 ISO	6.35	11	1.5		▲		
	11 IR 2.0 ISO	6.35	11	2		▲		
	11 IR 2.5 ISO	6.35	11	2.5		▲		
	11 IR 14W	6.35	11	14		▲		
	11 IR 16W	6.35	11	16		▲		
	11 IR 18W	6.35	11	18		▲		
	11 IR 19W	6.35	11	19		▲		
	11 IR 20W	6.35	11	20		▲		
	11 IR 24W	6.35	11	24		▲		
	11 IR 28W	6.35	11	28		▲		
	11 IR A55	6.35	11	48-16		▲		
	11 IR A60	6.35	11	48-16		▲		
	11 IR 8NPT	6.35	11	8		▲		
	11 IR 11.5NPT	6.35	11	11.5		▲		
	11 IR 14NPT	6.35	11	14		▲		
	11 IR 18NPT	6.35	11	18		▲		
	16 IR 0.50 ISO	9.525	16	0.5		▲		
	16 IR 0.75 ISO	9.525	16	0.75		▲		
	16 IR 1.0 ISO	9.525	16	1		▲		
	16 IR 1.25 ISO	9.525	16	1.25		▲		
	16 IR 1.5 ISO	9.525	16	1.5		▲		
	16 IR 1.75 ISO	9.525	16	1.75		▲		






Cont...

Inserts for Internal Threading



Appearance	Type	Dimensions (mm)				Grade		
		ØI.C.	L	PITCH	R	AG5015	AG5030	
	16 IR 2.0 ISO	9.525	16	2.0		▲		
	16 IR 2.5 ISO	9.525	16	2.5		▲		
	16 IR 16.0 ISO	9.525	16	3		▲		
	16 IR 16.5 ISO	9.525	16	3.5		▲		
	16 IR 8W	9.525	16	8		▲		
	16 IR 9W	9.525	16	9		▲		
	16 IR 10W	9.525	16	10		▲		
	16 IR 11W	9.525	16	11		▲		
	16 IR 12W	9.525	16	12		▲		
	16 IR 14W	9.525	16	14		▲		
	16 IR 16W	9.525	16	16		▲		
	16 IR 18W	9.525	16	18		▲		
	16 IR 19W	9.525	16	19		▲		
	16 IR 20W	9.525	16	20		▲		
	16 IR 26W	9.525	16	26		▲		
	16 IR 28W	9.525	16	28		▲		
	16 IR 8UN	9.525	16	8		▲		
	16 IR 9UN	9.525	16	9		▲		
	16 IR 10UN	9.525	16	10		▲		
	16 IR 11UN	9.525	16	11		▲		
	16 IR 12UN	9.525	16	12		▲		
	16 IR 116UN	9.525	16	13		▲		
	16 IR 14UN	9.525	16	14		▲		
	16 IR 16UN	9.525	16	16		▲		

Cont...

Inserts for Internal Threading






Appearance	Type	Dimensions (mm)				Grade		
		ØI.C.	L	PITCH	R	AG5015	AG5030	
	16 IR 18UN	9.525	16	18		▲		
	16 IR 20UN	9.525	16	20		▲		
	16 IR 24UN	9.525	16	24		▲		
	16 IR 28UN	9.525	16	28		▲		
	16 IR 162UN	9.525	16	32		▲		
	16 IR AG55	9.525	16	48-8		▲		
	16 IR AG60	9.525	16	48-8		▲		
	16 IR 8NPT	9.525	16	8		▲		
	16 IR 11.5NPT	9.525	16	11.5		▲		
	16 IR 14NPT	9.525	16	14		▲		
	16 IR 18NPT	9.525	16	18		▲		
	22 IR 4.0 ISO	12.7	22	4		▲		
	22 IR 5.0 ISO	12.7	22	5		▲		
	22 IR 6.0 ISO	12.7	22	6		▲		
	22 IR 5 ACME	12.7	22	5		▲		
	22 IR 6 ACME	12.7	22	6		▲		

Inserts for External Threading


Appearance	Type	Dimensions (mm)				Grade		
		ØI.C.	L	PITCH	R	AG5015	AG50160	
	16 ER 0.50 ISO	9.525	16	0.5		▲		
	16 ER 0.75 ISO	9.525	16	0.75		▲		
	16 ER 1.0 ISO	9.525	16	1		▲		
	16 ER 1.25 ISO	9.525	16	1.25		▲		
	16 ER 1.5 ISO	9.525	16	1.5		▲		
	16 ER 1.75 ISO	9.525	16	1.75		▲		
	16 ER 2.0 ISO	9.525	16	2.0		▲		
	16 ER 2.5 ISO	9.525	16	2.5		▲		
	16 ER 16.0 ISO	9.525	16	16		▲		
	16 ER 16.5 ISO	9.525	16	16.5		▲		
	16 ER 8W	9.525	16	8		▲		
	16 ER 9W	9.525	16	9		▲		
	16 ER 10W	9.525	16	10		▲		
	16 ER 11W	9.525	16	11		▲		
	16 ER 12W	9.525	16	12		▲		
	16 ER 14W	9.525	16	14		▲		
	16 ER 16W	9.525	16	16		▲		
	16 ER 18W	9.525	16	18		▲		
	16 ER 19W	9.525	16	19		▲		
	16 ER 20W	9.525	16	20		▲		
	16 ER 26W	9.525	16	26		▲		
	16 ER 28W	9.525	16	28		▲		

Cont...

Inserts for External Threading


Appearance	Type	Dimensions (mm)				Grade		
		ØI.C.	L	PITCH	R	AG5015	AG50160	
	16 ER 8UN	9.525	16	8		▲		
	16 ER 9UN	9.525	16	9		▲		
	16 ER 10UN	9.525	16	10		▲		
	16 ER 11UN	9.525	16	11		▲		
	16 ER 12UN	9.525	16	12		▲		
	16 ER 116UN	9.525	16	116		▲		
	16 ER 14UN	9.525	16	14		▲		
	16 ER 16UN	9.525	16	16		▲		
	16 ER 18UN	9.525	16	18		▲		
	16 ER 20UN	9.525	16	20		▲		
	16 ER 24UN	9.525	16	24		▲		
	16 ER 28UN	9.525	16	28		▲		
	16 ER 162UN	9.525	16	162		▲		
	16 ER AG55	9.525	16	48-8		▲		
	16 ER AG60	9.525	16	48-8		▲		
	16 ER 8NPT	9.525	16	8		▲		
	16 ER 11.5NPT	9.525	16	11.5		▲		
	16 ER 14NPT	9.525	16	14		▲		
	16 ER 18NPT	9.525	16	18		▲		
	22 ER 4.0 ISO	12.7	22	4		▲		
	22 ER 5.0 ISO	12.7	22	5		▲		
	22 ER 6.0 ISO	12.7	22	6		▲		
	22 ER 5 ACME	12.7	22	5		▲		
	22 ER 6 ACME	12.7	22	6		▲		

Inserts for Internal Grooving


Appearance	Type	Dimensions (mm)				Grade		
		ØI.C.	L	W	G	AG5015	AG5030	
	16 IR/EL 0.80	9.525	16	0.8	1.4	▲		
	16 IR/EL 0.90	9.525	16	0.9	1.4	▲		
	16 IR/EL 1.0	9.525	16	1	1.4	▲		
	16 IR/EL 1.05	9.525	16	1.05	1.8	▲		
	16 IR/EL 1.10	9.525	16	1.1	1.8	▲		
	16 IR/EL 1.20	9.525	16	1.2	1.8	▲		
	16 IR/EL 1.25	9.525	16	1.25	1.8	▲		
	16 IR/EL 1.30	9.525	16	1.3	1.8	▲		
	16 IR/EL 1.35	9.525	16	1.35	1.8	▲		
	16 IR/EL 1.40	9.525	16	1.4	1.8	▲		
	16 IR/EL 1.45	9.525	16	1.45	1.8	▲		
	16 IR/EL 1.50	9.525	16	1.5	1.8	▲		
	16 IR/EL 1.55	9.525	16	1.55	2	▲		
	16 IR/EL 1.60	9.525	16	1.6	2	▲		
	16 IR/EL 1.65	9.525	16	1.65	2	▲		
	16 IR/EL 1.70	9.525	16	1.7	2	▲		
	16 IR/EL 1.75	9.525	16	1.75	2	▲		
	16 IR/EL 1.80	9.525	16	1.8	2	▲		
	16 IR/EL 1.85	9.525	16	1.85	2	▲		
	16 IR/EL 1.90	9.525	16	1.9	2	▲		
	16 IR/EL 1.95	9.525	16	1.95	2	▲		
16 IR/EL 2.0	9.525	16	2.0	2	▲			
16 IR/EL 2.05	9.525	16	2.05	2.2	▲			
16 IR/EL 2.15	9.525	16	2.15	2.2	▲			

Cont...

Inserts for Internal Grooving


Appearance	Type	Dimensions (mm)				Grade		
		ØI.C.	L	W	G	AG5015	AG5030	
	16 IR/EL 2.20	9.525	16	2.2	2.2	▲		
	16 IR/EL 2.25	9.525	16	2.25	2.2	▲		
	16 IR/EL 2.30	9.525	16	2.3	2.2	▲		
	16 IR/EL 2.40	9.525	16	2.4	2.2	▲		
	16 IR/EL 2.50	9.525	16	2.5	2.2	▲		
	16 IR/EL 2.55	9.525	16	2.55	2	▲		
	16 IR/EL 2.60	9.525	16	2.6	2	▲		
	16 IR/EL 2.70	9.525	16	2.7	2	▲		
	16 IR/EL 2.80	9.525	16	2.8	2	▲		
	16 IR/EL 2.90	9.525	16	2.9	2	▲		
	16 IR/EL 3.0	9.525	16	3	2	▲		





Inserts for External Grooving

Appearance	Type	Dimensions (mm)				Grade		
		ØI.C.	L	W	G	AG5015	AG5030	
	16 ER/IL 0.80	9.525	16	0.8	1.4	▲		
	16 ER/IL 0.90	9.525	16	0.9	1.4	▲		
	16 ER/IL 1.0	9.525	16	1	1.4	▲		
	16 ER/IL 1.05	9.525	16	1.05	1.8	▲		
	16 ER/IL 1.10	9.525	16	1.1	1.8	▲		
	16 ER/IL 1.20	9.525	16	1.2	1.8	▲		
	16 ER/IL 1.25	9.525	16	1.25	1.8	▲		
	16 ER/IL 1.30	9.525	16	1.3	1.8	▲		
	16 ER/IL 1.35	9.525	16	1.35	1.8	▲		
	16 ER/IL 1.40	9.525	16	1.4	1.8	▲		
	16 ER/IL 1.45	9.525	16	1.45	1.8	▲		
	16 ER/IL 1.50	9.525	16	1.5	1.8	▲		
	16 ER/IL 1.55	9.525	16	1.55	2	▲		
	16 ER/IL 1.60	9.525	16	1.6	2	▲		
	16 ER/IL 1.65	9.525	16	1.65	2	▲		
	16 ER/IL 1.70	9.525	16	1.7	2	▲		
	16 ER/IL 1.75	9.525	16	1.75	2	▲		
	16 ER/IL 1.80	9.525	16	1.8	2	▲		
	16 ER/IL 1.85	9.525	16	1.85	2	▲		
	16 ER/IL 1.90	9.525	16	1.9	2	▲		
	16 ER/IL 1.95	9.525	16	1.95	2	▲		
16 ER/IL 2.0	9.525	16	2.0	2	▲			
16 ER/IL 2.05	9.525	16	2.05	2.2	▲			
16 ER/IL 2.15	9.525	16	2.15	2.2	▲			


Cont...

Inserts for External Grooving


Appearance	Type	Dimensions (mm)				Grade		
		ØI.C.	L	W	G	AG5015	AG5030	
	16 ER/IL 2.20	9.525	16	2.2	2.2	▲		
	16 ER/IL 2.25	9.525	16	2.25	2.2	▲		
	16 ER/IL 2.30	9.525	16	2.3	2.2	▲		
	16 ER/IL 2.40	9.525	16	2.4	2.2	▲		
	16 ER/IL 2.50	9.525	16	2.5	2.2	▲		
	16 ER/IL 2.55	9.525	16	2.55	2	▲		
	16 ER/IL 2.60	9.525	16	2.6	2	▲		
	16 ER/IL 2.70	9.525	16	2.7	2	▲		
	16 ER/IL 2.80	9.525	16	2.8	2	▲		
	16 ER/IL 2.90	9.525	16	2.9	2	▲		
	16 ER/IL 3.0	9.525	16	3	2	▲		

Appearance	Type	Dimensions (mm)					Grade	
		W±0.05	R	D	L	S	AG5015	AG5030
	MGMN150-G	1.5	0.15	1.2	16	3.5	▲	
	MGMN200-G	2.0	0.2	1.6	16	3.85	▲	
	MGMN250-M	2.5	0.2	2.0	18.5	4.8	▲	
	MGMN300-M	3.0	0.4	2.35	21	4.8	▲	
	MGMN400-M	4.0	0.4	3.3	21	5.8	▲	
	MGMN500-M	5.0	0.8	5.0	26	5.8	▲	
	MGMN600-M	6.0	0.8	2.35	26	5.8	▲	
	MRMN200-M	2.0	1.0	1.6	16	3.5	▲	
	MRMN300-M	3.0	1.5	2.35	21	4.8	▲	
	MRMN400-M	4.0	2.0	3.3	21	4.8	▲	
	MRMN500-M	5.0	2.5	4.1	25.86	5.8	▲	
	MRMN600-M	6.0	3.0	5.0	26	5.8	▲	
	TDC-2	2.0	0.2	1.7	20	3.9	▲	
	TDC-3	3.0	0.2	2.4	20	4.0	▲	
	TDC-4	4.0	0.3	3.0	20	4.03	▲	
	TDC-5	5.0	0.3	4.0	25	4.89	▲	
	TDT-3	3.0	0.2	2.4	20	4.0	▲	
	TDT-4	4.0	0.3	3.0	20	4.03	▲	
	TDT-5	5.0	0.3	4.0	25	4.89	▲	


Endmill (55HRC)

Appearance	Flat Endmill	Dia.	Flute Length	Shank Dia	Total Length	Number of Flutes
	1.0 x 3 x 4 x 50	1.0	3	4	50	4F
	1.5 x 4 x 4 x 50	1.5	4	4	50	4F
	2.0 x 5 x 4 x 50	2.0	5	4	50	4F
	2.5 x 8 x 4 x 50	2.5	8	4	50	4F
	3.0 x 8 x 3 x 50	3.0	8	3	50	4F
	3.0 x 8 x 4 x 50	3.0	8	4	50	4F
	3.0 x 12 x 3 x 75	3.0	12	3	75	4F
	3.0 x 15 x 3 x 100	3.0	15	3	100	4F
	3.5 x 10 x 4 x 50	3.5	10	4	50	4F
	4.0 x 10 x 4 x 50	4.0	10	4	50	4F
	4.0 x 16 x 4 x 75	4.0	16	4	75	4F
	4.0 x 20 x 4 x 100	4.0	20	4	100	4F
	5.0 x 13 x 5 x 50	5.0	13	5	50	4F
	5.0 x 20 x 5 x 75	5.0	20	5	75	4F
	5.0 x 25 x 5 x 100	5.0	25	5	100	4F
	6.0 x 15 x 6 x 50	6.0	15	6	50	4F
	6.0 x 25 x 6 x 75	6.0	25	6	75	4F
	6.0 x 30 x 6 x 100	6.0	30	6	100	4F
	6.0 x 40 x 6 x 150	6.0	40	6	150	4F
	8.0 x 20 x 8 x 60	8.0	20	8	60	4F
	8.0 x 28 x 8 x 75	8.0	28	8	75	4F
	8.0 x 35 x 8 x 100	8.0	35	8	100	4F
	8.0 x 50 x 8 x 150	8.0	50	8	150	4F
	10.0 x 25 x 10 x 75	10.0	25	10	75	4F
	10.0 x 40 x 10 x 100	10.0	40	10	100	4F
	10.0 x 50 x 10 x 150	10.0	50	10	150	4F
	12.0 x 30 x 12 x 75	12.0	30	12	75	4F
	12.0 x 45 x 12 x 100	12.0	45	12	100	4F
	12.0 x 55 x 12 x 150	12.0	55	12	150	4F
	14.0 x 45 x 14 x 100	14.0	45	14	100	4F
	14.0 x 60 x 14 x 150	14.0	60	14	150	4F
	16.0 x 45 x 16 x 100	16.0	45	16	100	4F
16.0 x 60 x 16 x 150	16.0	60	16	150	4F	
20.0 x 45 x 20 x 100	20.0	45	20	100	4F	
20.0 x 70 x 20 x 150	20.0	70	20	150	4F	

Ballnose (55HRC)

Appearance	Ballnose	Dia.	Flute Length	Shank Dia	Total Length	Number of Flutes
	1.0 x 3 x 4 x 50	1.0	3	4	50	2F
	1.5 x 4 x 4 x 50	1.5	4	4	50	2F
	2.0 x 6 x 4 x 50	2.0	6	4	50	2F/4F
	2.5 x 8 x 4 x 50	2.5	8	4	50	2F/4F
	3.0 x 10 x 4 x 50	3.0	10	4	50	2F/4F
	3.0 x 15 x 3 x 75	3.0	15	3	75	2F/4F
	3.0 x 20 x 3 x 100	3.0	20	3	100	2F/4F
	3.5 x 8 x 4 x 50	3.5	8	4	50	2F/4F
	4.0 x 14 x 4 x 50	4.0	14	4	50	2F/4F
	4.0 x 20 x 4 x 75	4.0	20	4	75	2F/4F
	4.0 x 25 x 4 x 100	4.0	25	4	100	2F/4F
	5.0 x 13 x 5 x 50	5.0	13	5	50	2F/4F
	5.0 x 20 x 5 x 75	5.0	20	5	75	2F/4F
	5.0 x 30 x 5 x 100	5.0	30	5	100	2F/4F
	6.0 x 20 x 6 x 50	6.0	20	6	50	2F/4F
	6.0 x 28 x 6 x 75	6.0	28	6	75	2F/4F
	6.0 x 40 x 6 x 100	6.0	40	6	100	2F/4F
	6.0 x 40 x 6 x 150	6.0	40	6	150	2F/4F
	8.0 x 20 x 8 x 60	8.0	20	8	60	2F/4F
	8.0 x 30 x 8 x 75	8.0	30	8	75	2F/4F
	8.0 x 40 x 8 x 100	8.0	40	8	100	2F/4F
	8.0 x 50 x 8 x 150	8.0	50	8	150	2F/4F
	10.0 x 32 x 10 x 75	10.0	32	10	75	2F/4F
	10.0 x 40 x 10 x 100	10.0	40	10	100	2F/4F
	10.0 x 60 x 10 x 150	10.0	60	10	150	2F/4F
	12.0 x 30 x 12 x 75	12.0	30	12	75	2F/4F
	12.0 x 50 x 12 x 100	12.0	50	12	100	2F/4F
	12.0 x 70 x 12 x 150	12.0	70	12	150	2F/4F
	14.0 x 28 x 14 x 100	14.0	28	14	100	2F/4F
	14.0 x 30 x 14 x 150	14.0	30	14	150	2F/4F
16.0 x 50 x 16 x 100	16.0	50	16	100	2F/4F	
16.0 x 60 x 16 x 150	16.0	60	16	150	2F/4F	
20.0 x 50 x 20 x 100	20.0	50	20	100	2F/4F	
20.0 x 65 x 20 x 150	20.0	65	20	150	2F/4F	

Endmill For Aluminium (45HRC)

Appearance	Flat Endmill	Dia.	Flute Length	Shank Dia	Total Length	Number of Flutes
	1.0 x 3 x 4 x 50	1.0	3	4	50	3F
	1.5 x 5 x 4 x 50	1.5	5	4	50	3F
	2.0 x 6 x 4 x 50	2.0	6	4	50	3F
	3.0 x 9 x 3 x 50	3.0	9	3	50	3F
	4.0 x 12 x 4 x 50	4.0	12	4	50	3F
	4.0 x 20 x 4 x 75	4.0	20	4	75	3F
	4.0 x 25 x 4 x 100	4.0	25	4	100	3F
	5.0 x 15 x 5 x 50	5.0	15	5	50	3F
	5.0 x 20 x 5 x 75	5.0	20	5	75	3F
	5.0 x 25 x 5 x 100	5.0	25	5	100	3F
	6.0 x 18 x 6 x 50	6.0	18	6	50	3F
	6.0 x 25 x 6 x 75	6.0	25	6	75	3F
	6.0 x 30 x 6 x 100	6.0	30	6	100	3F
	8.0 x 24 x 8 x 60	8.0	24	8	60	3F
	8.0 x 35 x 8 x 75	8.0	35	8	75	3F
	8.0 x 35 x 8 x 100	8.0	35	8	100	3F
	10.0 x 30 x 10 x 75	10.0	30	10	75	3F
	10.0 x 40 x 10 x 100	10.0	40	10	100	3F
	12.0 x 36 x 12 x 75	12.0	36	12	75	3F
	12.0 x 45 x 12 x 100	12.0	45	12	100	3F
14.0 x 45 x 14 x 100	14.0	45	14	100	3F	
16.0 x 45 x 16 x 100	16.0	45	16	100	3F	

Indexable Endmill Series (APMT)

Type	Dimensions (mm)			Teeth	Suitable Insert	Screw	Screw Driver
	Dia.	Shank	Length				
AG-300R-10-C10-120-1T	10	10	120	1	AP1135	M2.5 x 6	T8
AG-300R-12-C12-130-1T	12	12	130	1	AP1135	M2.5 x 6	T8
AG-300R-14-C14-150-2T	14	14	150	2	AP1135	M2.5 x 6	T8
AG-300R-16-C16-150-2T	16	16	150	2	AP1135	M2.5 x 6	T8
AG-300R-16-C16-200-2T	16	16	200	2	AP1135	M2.5 x 6	T8
AG-300R-18-C16-200-2T	18	16	200	2	AP1135	M2.5 x 6	T8
AG-300R-20-C20-150-2T	20	20	150	2	AP1135	M2.5 x 6	T8
AG-300R-20-C20-200-2T	20	20	200	2	AP1135	M2.5 x 6	T8
AG-300R-20-C20-300-2T	20	20	300	2	AP1135	M2.5 x 6	T8
AG-300R-25-C25-200-3T	25	25	200	3	AP1135	M2.5 x 6	T8
AG-300R-32-C32-200-4T	32	32	200	4	AP1135	M2.5 x 6	T8

AG-400R-25-C25-150-2T	25	25	150	2	AP1604	M4 x 10	T15
AG-400R-25-C25-200-2T	25	25	200	2	AP1604	M4 x 10	T15
AG-400R-25-C25-300-2T	25	25	300	2	AP1604	M4 x 10	T15
AG-400R-25-C25-400-2T	25	25	400	2	AP1604	M4 x 10	T15
AG-400R-32-C32-150-3T	32	32	150	3	AP1604	M4 x 10	T15
AG-400R-32-C32-200-3T	32	32	200	3	AP1604	M4 x 10	T15
AG-400R-32-C32-300-3T	32	32	300	3	AP1604	M4 x 10	T15
AG-400R-32-C32-400-3T	32	32	400	3	AP1604	M4 x 10	T15
AG-400R-40-C40-200-4T	40	40	200	4	AP1604	M4 x 10	T15

Indexable Endmill Series (R4, R5, R6)

Type	Dimensions (mm)			Teeth	Suitable Insert	Screw	Screw Driver
	Dia.	Shank	Length				
AG-EMR-4R-16-C16-200-2T	16	16	200	2	R***08T2	M3 x 10	T8
AG-EMR-5R-20-C20-200-2T	20	20	200	2	R***10T3	M4 x 10	T15
AG-EMR-5R-25-C25-200-2T	25	25	200	2	R***10T3	M4 x 10	T15
AG-EMR-5R-32-C32-200-3T	32	32	200	3	R***10T3	M4 x 10	T15
AG-EMR-6R-25-C25-200-2T	25	25	200	2	R***1204	M4 x 10	T15
AG-EMR-6R-32-C32-200-2T	32	32	200	2	R***1204	M4 x 10	T15
AG-EMR-6R-32-C32-300-2T	32	32	300	2	R***1204	M4 x 10	T15
AG-EMR-6R-32-C32-400-2T	32	32	400	2	R***1204	M4 x 10	T15
AG-EMR-6R-40-C32-200-3T	40	32	200	3	R***1204	M4 x 10	T15

Indexable Endmill Series (LNMU 0303)

Type	Dimensions (mm)			Teeth	Suitable Insert	Screw	Screw Driver
	Dia.	Shank	Length				
AG-EXN03R-16-C16-150-2T	16	16	150	2	LNMU 03	M2.5 x 8	T8
AG-EXN03R-16-C16-200-2T	16	16	200	2	LNMU 03	M2.5 x 8	T8
AG-EXN03R-20-C20-150-3T	20	20	150	3	LNMU 03	M2.5 x 8	T8
AG-EXN03R-20-C20-200-3T	20	20	200	3	LNMU 03	M2.5 x 8	T8
AG-EXN03R-25-C25-150-4T	25	25	150	4	LNMU 03	M2.5 x 8	T8
AG-EXN03R-25-C25-200-4T	25	25	200	4	LNMU 03	M2.5 x 8	T8
AG-EXN03R-32-C32-150-5T	32	32	150	5	LNMU 03	M2.5 x 8	T8
AG-EXN03R-32-C32-200-5T	32	32	200	5	LNMU 03	M2.5 x 8	T8

Face Mill Series (APMT)

Type	Dimensions (mm)		No. of Edges	Suitable Insert	Screw	Screw Driver
	Dia.	FMC Dia.				
AG-400R-040-16-4T	40	16	4	AP1604	M4 x 10	T15
AG-400R-050-22-4T	50	22	4	AP1604	M4 x 10	T15
AG-400R-063-22-4T	60	22	4	AP1604	M4 x 10	T15
AG-400R-080-27-6T	80	27	6	AP1604	M4 x 10	T15
AG-400R-100-32-6T	100	32	6	AP1604	M4 x 10	T15
AG-400R-125-40-7T	125	40	7	AP1604	M4 x 10	T15

Face Mill Series (R4, R5, R6)

Type	Dimensions (mm)		No. of Edges	Suitable Insert	Screw	Screw Driver
	Dia.	FMC Dia.				
AG-EMR-5R-050-22-4T	50	22	4	R***10T3	M4 x 10	T15
AG-EMR-6R-050-22-4T	50	22	4	R***1204	M4 x 10	T15
AG-EMR-6R-052-22-4T	52	22	4	R***1204	M4 x 10	T15
AG-EMR-6R-063-22-5T	63	22	5	R***1204	M4 x 10	T15
AG-EMR-6R-068-22-5T	68	22	5	R***1204	M4 x 10	T15
AG-EMR-6R-080-27-6T	80	27	6	R***1204	M4 x 10	T15
AG-EMR-6R-100-32-6T	100	32	6	R***1204	M4 x 10	T15

Face Mill Series (LNMU 0303)

Type	Dimensions (mm)		No. of Edges	Suitable Insert	Screw	Screw Driver
	Dia.	FMC Dia.				
AG-EXN03-40-22-6T	40	22	6	LNMU 03	M2.5 x 8	T8
AG-EXN03-50-22-8T	50	22	8	LNMU 03	M2.5 x 8	T8
AG-EXN03-63-22-10T	63	22	10	LNMU 03	M2.5 x 8	T8

Face Mill Series (ONMU 0806)

Type	Dimensions (mm)		No. of Edges	Suitable Insert	Screw	Screw Driver
	Dia.	FMC Dia.				
ON08-AG-63-22-5T	63	22	5	ONMU 08	M5 x 12	T20
ON08-AG-80-27-6T	80	27	6	ONMU 08	M5 x 12	T20
ON08-AG-100-32-7T	100	32	7	ONMU 08	M5 x 12	T20
ON08-AG-125-40-12T	125	40	12	ONMU 08	M5 x 12	T20
ON08-AG-160-40-14T	160	40	14	ONMU 08	M5 x 12	T20

45° Face Mill Series (ONMU 0605 & SNMU 1505)

Type	Dimensions (mm)		No. of Edges	Suitable Insert	Screw	Screw Driver
	Dia.	FMC Dia.				
45-AG-050-22-4T	50	22	4	ON06/SN15	M5 x 12	T20
45-AG-063-22-6T	63	22	6	ON06/SN15	M5 x 12	T20
45-AG-080-27-6T	80	27	6	ON06/SN15	M5 x 12	T20
45-AG-100-32-8T	100	32	8	ON06/SN15	M5 x 12	T20
45-AG-125-40-10T	125	40	10	ON06/SN15	M5 x 12	T20
45-AG-160-40-12T	160	40	12	ON06/SN15	M5 x 12	T20
45-AG-200-60-14T	200	60	14	ON06/SN15	M5 x 12	T20

88° Sholder Mill Series (SNMX 1206)

Type	Dimensions (mm)		No. of Edges	Suitable Insert	Screw	Screw Driver
	Dia.	FMC Dia.				
88-AG-050-22-4T	50	22	4	SNMX 1206	M4 x 10	T15
88-AG-063-22-6T	63	22	6	SNMX 1206	M4 x 10	T15
88-AG-080-27-6T	80	27	6	SNMX 1206	M4 x 10	T15
88-AG-100-32-8T	100	32	8	SNMX 1206	M4 x 10	T15
88-AG-125-40-10T	125	40	10	SNMX 1206	M4 x 10	T15
88-AG-160-40-12T	160	40	12	SNMX 1206	M4 x 10	T15
88-AG-200-60-14T	200	60	14	SNMX 1206	M4 x 10	T15

SP Indexable U-drill (2D)

Description	Dimensions (mm)			Suitable Insert	Screw	Screw Driver
	Dia.	FL	Shank			
AG-C20-2D12-24	12	24	20	SP**0402	M1.9 x 4	T6
AG-C20-2D12.5-25	12.5	25	20	SP**0402	M1.9 x 4	T6
AG-C25-2D13-26	13	26	25	SP**0402	M1.9 x 4	T6
AG-C25-2D13.5-27	13.5	27	25	SP**0402	M1.9 x 4	T6
AG-C25-2D14-28	14	28	25	SP**0502	M2 x 4	T6
AG-C25-2D14.5-29	14.5	29	25	SP**0502	M2 x 4	T6
AG-C25-2D15-30	15	30	25	SP**0502	M2 x 4	T6
AG-C25-2D15.5-31	15.5	31	25	SP**0502	M2 x 4	T6
AG-C25-2D16-32	16	32	25	SP**0502	M2 x 4	T6
AG-C25-2D16.5-33	16.5	33	25	SP**0502	M2 x 4	T6
AG-C25-2D17-34	17	34	25	SP**0602	M2.2 x 4	T6
AG-C25-2D17.5-35	17.5	35	25	SP**0602	M2.2 x 4	T6
AG-C25-2D18-36	18	36	25	SP**0602	M2.2 x 4	T6
AG-C25-2D18.5-37	18.5	37	25	SP**0602	M2.2 x 4	T6
AG-C25-2D19-38	19	38	25	SP**0602	M2.2 x 4	T6
AG-C25-2D19.5-39	19.5	39	25	SP**0602	M2.2 x 4	T6
AG-C25-2D20-40	20	40	25	SP**0602	M2.2 x 4	T6
AG-C25-2D20.5-41	20.5	41	25	SP**0602	M2.2 x 4	T6
AG-C25-2D-21-42	21	42	25	SP**0602	M2.2 x 4	T6
AG-C25-2D-21.5-43	21.5	43	25	SP**0602	M2.2 x 4	T6
AG-C32-2D22-44	22	44	32	SP**07T3	M2.5 x 6	T8
AG-C32-2D22.5-45	22.5	45	32	SP**07T3	M2.5 x 6	T8
AG-C32-2D23-46	23	46	32	SP**07T3	M2.5 x 6	T8
AG-C32-2D23.5-47	23.5	47	32	SP**07T3	M2.5 x 6	T8
AG-C32-2D24-48	24	48	32	SP**07T3	M2.5 x 6	T8
AG-C32-2D24.5-49	24.5	49	32	SP**07T3	M2.5 x 6	T8
AG-C32-2D25-50	25	50	32	SP**07T3	M2.5 x 6	T8
AG-C32-2D25.5-51	25.5	51	32	SP**07T3	M2.5 x 6	T8
AG-C32-2D26-52	26	52	32	SP**0904	M3.5 x 8	T15

Cont...

SP Indexable U-drill (2D)

Description	Dimensions (mm)			Suitable Insert	Screw	Screw Driver
	Dia.	FL	Shank			
AG-C32-2D26.5-53	26.5	53	32	SP**0904	M3.5 x 8	T15
AG-C32-2D27-54	27	54	32	SP**0904	M3.5 x 8	T15
AG-C32-2D27.5-55	27.5	55	32	SP**0904	M3.5 x 8	T15
AG-C32-2D28-56	28	56	32	SP**0904	M3.5 x 8	T15
AG-C32-2D28.5-57	28.5	57	32	SP**0904	M3.5 x 8	T15
AG-C32-2D29-58	29	58	32	SP**0904	M3.5 x 8	T15
AG-C32-2D29.5-59	29.5	59	32	SP**0904	M3.5 x 8	T15
AG-C32-2D30-60	30	60	32	SP**0904	M3.5 x 8	T15
AG-C32-2D30.5-61	30.5	61	32	SP**0904	M3.5 x 8	T15
AG-C32-2D31-62	31	62	32	SP**0904	M3.5 x 8	T15
AG-C32-2D31.5-63	31.5	63	32	SP**0904	M3.5 x 8	T15
AG-C32-2D32-64	32	64	32	SP**1104	M4 x 10	T15
AG-C32-2D32.5-65	32.5	65	32	SP**1104	M4 x 10	T15
AG-C32-2D33-66	33	66	32	SP**1104	M4 x 10	T15
AG-C32-2D33.5-67	33.5	67	32	SP**1104	M4 x 10	T15
AG-C32-2D34-68	34	68	32	SP**1104	M4 x 10	T15
AG-C32-2D34.5-69	34.5	69	32	SP**1104	M4 x 10	T15
AG-C32-2D35-70	35	70	32	SP**1104	M4 x 10	T15
AG-C32-2D35.5-71	35.5	71	32	SP**1104	M4 x 10	T15
AG-C32-2D36-72	36	72	32	SP**1104	M4 x 10	T15
AG-C32-2D37-74	37	74	32	SP**1104	M4 x 10	T15
AG-C32-2D38-76	38	76	32	SP**1104	M4 x 10	T15
AG-C40-2D39-78	39	78	40	SP**1104	M4 x 10	T15
AG-C40-2D40-80	40	80	40	SP**1104	M4 x 10	T15
AG-C40-2D41-82	41	82	40	SP**1104	M4 x 10	T15
AG-C40-2D42-84	42	84	40	SP**1405	M5 x 12	T20
AG-C40-2D43-86	43	86	40	SP**1405	M5 x 12	T20
AG-C40-2D44-88	44	88	40	SP**1405	M5 x 12	T20
AG-C40-2D45-90	45	90	40	SP**1405	M5 x 12	T20

SP Indexable U-drill (3D)

Description	Dimensions (mm)			Suitable Insert	Screw	Screw Driver
	Dia.	FL	Shank			
AG-C20-3D12-36	12	36	20	SP**0402	M1.9 x 4	T6
AG-C20-3D12.5-38	12.5	38	20	SP**0402	M1.9 x 4	T6
AG-C25-3D13-39	13	39	25	SP**0402	M1.9 x 4	T6
AG-C25-3D13.5-41	13.5	41	25	SP**0402	M1.9 x 4	T6
AG-C25-3D14-42	14	42	25	SP**0502	M2 x 4	T6
AG-C25-3D14.5-44	14.5	44	25	SP**0502	M2 x 4	T6
AG-C25-3D15-45	15	45	25	SP**0502	M2 x 4	T6
AG-C25-3D15.5-47	15.5	47	25	SP**0502	M2 x 4	T6
AG-C25-3D16-48	16	48	25	SP**0502	M2 x 4	T6
AG-C25-3D16.5-50	16.5	50	25	SP**0502	M2 x 4	T6
AG-C25-3D17-51	17	51	25	SP**0602	M2.2 x 4	T6
AG-C25-3D17.5-53	17.5	53	25	SP**0602	M2.2 x 4	T6
AG-C25-3D18-54	18	54	25	SP**0602	M2.2 x 4	T6
AG-C25-3D18.5-56	18.5	56	25	SP**0602	M2.2 x 4	T6
AG-C25-3D19-57	19	57	25	SP**0602	M2.2 x 4	T6
AG-C25-3D19.5-59	19.5	59	25	SP**0602	M2.2 x 4	T6
AG-C25-3D20-60	20	60	25	SP**0602	M2.2 x 4	T6
AG-C25-3D20.5-62	20.5	62	25	SP**0602	M2.2 x 4	T6
AG-C25-3D-21-63	21	63	25	SP**0602	M2.2 x 4	T6
AG-C25-3D-21.5-65	21.5	65	25	SP**0602	M2.2 x 4	T6
AG-C32-3D22-66	22	66	32	SP**07T3	M2.5 x 6	T8
AG-C32-3D22.5-68	22.5	68	32	SP**07T3	M2.5 x 6	T8
AG-C32-3D23-69	23	69	32	SP**07T3	M2.5 x 6	T8
AG-C32-3D23.5-71	23.5	71	32	SP**07T3	M2.5 x 6	T8
AG-C32-3D24-72	24	72	32	SP**07T3	M2.5 x 6	T8
AG-C32-3D24.5-74	24.5	74	32	SP**07T3	M2.5 x 6	T8
AG-C32-3D25-75	25	75	32	SP**07T3	M2.5 x 6	T8
AG-C32-3D25.5-77	25.5	77	32	SP**07T3	M2.5 x 6	T8
AG-C32-3D26-78	26	78	32	SP**0904	M3.5 x 8	T15

Cont...

SP Indexable U-drill (3D)

Description	Dimensions (mm)			Suitable Insert	Screw	Screw Driver
	Dia.	FL	Shank			
AG-C32-3D26.5-80	26.5	80	32	SP**0904	M3.5 x 8	T15
AG-C32-3D27-81	27	81	32	SP**0904	M3.5 x 8	T15
AG-C32-3D27.5-83	27.5	83	32	SP**0904	M3.5 x 8	T15
AG-C32-3D28-84	28	84	32	SP**0904	M3.5 x 8	T15
AG-C32-3D28.5-86	28.5	86	32	SP**0904	M3.5 x 8	T15
AG-C32-3D29-87	29	87	32	SP**0904	M3.5 x 8	T15
AG-C32-3D29.5-89	29.5	89	32	SP**0904	M3.5 x 8	T15
AG-C32-3D30-90	30	90	32	SP**0904	M3.5 x 8	T15
AG-C32-3D30.5-92	30.5	92	32	SP**0904	M3.5 x 8	T15
AG-C32-3D31-93	31	93	32	SP**0904	M3.5 x 8	T15
AG-C32-3D31.5-95	31.5	94	32	SP**0904	M3.5 x 8	T15
AG-C32-3D32-96	32	96	32	SP**1104	M4 x 10	T15
AG-C32-3D32.5-98	32.5	98	32	SP**1104	M4 x 10	T15
AG-C32-3D33-99	33	99	32	SP**1104	M4 x 10	T15
AG-C32-3D33.5-101	33.5	101	32	SP**1104	M4 x 10	T15
AG-C32-3D34-102	34	102	32	SP**1104	M4 x 10	T15
AG-C32-3D34.5-104	34.5	104	32	SP**1104	M4 x 10	T15
AG-C32-3D35-105	35	105	32	SP**1104	M4 x 10	T15
AG-C32-3D35.5-107	35.5	107	32	SP**1104	M4 x 10	T15
AG-C32-3D36-108	36	108	32	SP**1104	M4 x 10	T15
AG-C32-3D37-111	37	111	32	SP**1104	M4 x 10	T15
AG-C32-3D38-114	38	114	32	SP**1104	M4 x 10	T15
AG-C40-3D39-117	39	117	40	SP**1104	M4 x 10	T15
AG-C40-3D40-120	40	120	40	SP**1104	M4 x 10	T15
AG-C40-3D41-123	41	123	40	SP**1104	M4 x 10	T15
AG-C40-3D42-126	42	126	40	SP**1405	M5 x 12	T20
AG-C40-3D43-129	43	129	40	SP**1405	M5 x 12	T20
AG-C40-3D44-132	44	132	40	SP**1405	M5 x 12	T20
AG-C40-3D45-135	45	135	40	SP**1405	M5 x 12	T20

SP Indexable U-drill (4D)

Description	Dimensions (mm)			Suitable Insert	Screw	Screw Driver
	Dia.	FL	Shank			
AG-C20-4D12-48	12	48	20	SP**0402	M1.9 x 4	T6
AG-C20-4D12.5-50	12.5	50	20	SP**0402	M1.9 x 4	T6
AG-C25-4D13-52	13	52	25	SP**0402	M1.9 x 4	T6
AG-C25-4D13.5-54	13.5	54	25	SP**0402	M1.9 x 4	T6
AG-C25-4D14-56	14	56	25	SP**0502	M2 x 4	T6
AG-C25-4D14.5-58	14.5	58	25	SP**0502	M2 x 4	T6
AG-C25-4D15-60	15	60	25	SP**0502	M2 x 4	T6
AG-C25-4D15.5-62	15.5	62	25	SP**0502	M2 x 4	T6
AG-C25-4D16-64	16	64	25	SP**0502	M2 x 4	T6
AG-C25-4D16.5-66	16.5	66	25	SP**0502	M2 x 4	T6
AG-C25-4D17-68	17	68	25	SP**0602	M2.2 x 4	T6
AG-C25-4D17.5-70	17.5	70	25	SP**0602	M2.2 x 4	T6
AG-C25-4D18-72	18	72	25	SP**0602	M2.2 x 4	T6
AG-C25-4D18.5-74	18.5	74	25	SP**0602	M2.2 x 4	T6
AG-C25-4D19-76	19	76	25	SP**0602	M2.2 x 4	T6
AG-C25-4D19.5-78	19.5	78	25	SP**0602	M2.2 x 4	T6
AG-C25-4D20-80	20	80	25	SP**0602	M2.2 x 4	T6
AG-C25-4D20.5-82	20.5	82	25	SP**0602	M2.2 x 4	T6
AG-C25-4D-21-84	21	84	25	SP**0602	M2.2 x 4	T6
AG-C25-4D-21.5-86	21.5	86	25	SP**0602	M2.2 x 4	T6
AG-C32-4D22-88	22	88	32	SP**07T3	M2.5 x 6	T8
AG-C32-4D22.5-90	22.5	90	32	SP**07T3	M2.5 x 6	T8
AG-C32-4D23-92	23	92	32	SP**07T3	M2.5 x 6	T8
AG-C32-4D23.5-94	23.5	94	32	SP**07T3	M2.5 x 6	T8
AG-C32-4D24-96	24	96	32	SP**07T3	M2.5 x 6	T8
AG-C32-4D24.5-98	24.5	98	32	SP**07T3	M2.5 x 6	T8
AG-C32-4D25-100	25	100	32	SP**07T3	M2.5 x 6	T8
AG-C32-4D25.5-102	25.5	102	32	SP**07T3	M2.5 x 6	T8
AG-C32-4D26-104	26	104	32	SP**0904	M3.5 x 8	T15

Cont...

SP Indexable U-drill (4D)

Description	Dimensions (mm)			Suitable Insert	Screw	Screw Driver
	Dia.	FL	Shank			
AG-C32-4D26.5-106	26.5	106	32	SP**0904	M3.5 x 8	T15
AG-C32-4D27-108	27	108	32	SP**0904	M3.5 x 8	T15
AG-C32-4D27.5-110	27.5	110	32	SP**0904	M3.5 x 8	T15
AG-C32-4D28-112	28	112	32	SP**0904	M3.5 x 8	T15
AG-C32-4D28.5-114	28.5	114	32	SP**0904	M3.5 x 8	T15
AG-C32-4D29-116	29	116	32	SP**0904	M3.5 x 8	T15
AG-C32-4D29.5-118	29.5	118	32	SP**0904	M3.5 x 8	T15
AG-C32-4D30-120	30	120	32	SP**0904	M3.5 x 8	T15
AG-C32-4D30.5-122	30.5	122	32	SP**0904	M3.5 x 8	T15
AG-C32-4D31-124	31	124	32	SP**0904	M3.5 x 8	T15
AG-C32-4D31.5-126	31.5	126	32	SP**0904	M3.5 x 8	T15
AG-C32-4D32-128	32	128	32	SP**1104	M4 x 10	T15
AG-C32-4D32.5-130	32.5	130	32	SP**1104	M4 x 10	T15
AG-C32-4D33-132	33	132	32	SP**1104	M4 x 10	T15
AG-C32-4D33.5-134	33.5	134	32	SP**1104	M4 x 10	T15
AG-C32-4D34-136	34	136	32	SP**1104	M4 x 10	T15
AG-C32-4D34.5-138	34.5	138	32	SP**1104	M4 x 10	T15
AG-C32-4D35-140	35	140	32	SP**1104	M4 x 10	T15
AG-C32-4D35.5-142	35.5	142	32	SP**1104	M4 x 10	T15
AG-C32-4D36-144	36	144	32	SP**1104	M4 x 10	T15
AG-C32-4D37-148	37	148	32	SP**1104	M4 x 10	T15
AG-C32-4D38-152	38	152	32	SP**1104	M4 x 10	T15
AG-C40-4D39-156	39	156	40	SP**1104	M4 x 10	T15
AG-C40-4D40-160	40	160	40	SP**1104	M4 x 10	T15
AG-C40-4D41-164	41	164	40	SP**1104	M4 x 10	T15
AG-C40-4D42-168	42	168	40	SP**1405	M5 x 12	T20
AG-C40-4D43-172	43	172	40	SP**1405	M5 x 12	T20
AG-C40-4D44-176	44	176	40	SP**1405	M5 x 12	T20
AG-C40-4D45-180	45	180	40	SP**1405	M5 x 12	T20



Argus Carbide Private Limited

📍 Plot No. 1/B, Ganesh Ind. Area, N.H. - 27, Beside HDFC Bank
Gondal Bypass Circle, Vavdi Service Main Road,
Rajkot - 360 004 (Gujarat) INDIA.

📞 +91 85115 49549

🌐 www.arguscarbide.com

✉ info@arguscarbide.com

